

## MACHINE-DATA

|                  |                                |
|------------------|--------------------------------|
| Machinetype      | : Hydr. pressbrake             |
| Make             | : ERMAK                        |
| Type             | : POWER BEND PRO 26.100        |
| Year             | :                              |
| Control type     | :                              |
| Control          | :                              |
| Storage location | : Ahaus                        |
| Origin           | :                              |
| Delivery time    | : by appointment               |
| Quotation        | : ex works Ahaus, free loading |
| Price            | : on request                   |



## TECHNICAL DATA

|                          |                      |
|--------------------------|----------------------|
| pressure                 | 100 t                |
| chamfer lenght           | 2600 mm              |
| distance between columns | 2200 mm              |
| column arm               | 410 mm               |
| ram stroke speed         | 200 mm/sec           |
| return speed             | 155 mm/sec           |
| work speed               | 9,5 mm/sec           |
| work stroke              | 275 mm               |
| daylighth                | 530 mm               |
| table height             | 900 mm               |
| table width              | 90,0 mm              |
| oil volume               | 150 ltr.             |
| voltage                  | 400 Volt             |
| total power requirement  | 7,5 kW               |
| weight                   | 6.850 kg             |
| range L-W-H              | 3.750x1.950x2.800 mm |

## TECHNICAL DESCRIPTION

-----  
*Press brake with special equipment*

*\* increased installation height*

*\* increased cylinder stroke*

*\* as well as increased bending beam speeds*  
-----

*Furnishing:*



- DELEM CNC control model DA 53T (touchscreen)
- Motorized backgauge with R-axis, on recirculating ball spindles
- X = 800 mm R = 250 mm with 2 stop fingers
- controlled axes Y1 - Y2 - X - R - C (crowning)
- electr. Crowning controlled by CNC
- Upper deer foot tool with PS 135.85-R08, system "A" with quick-change clamp
- Additional crowning device in the tool holder of the upper tool
- 4V universal die block M 460 R with die shoe 60 mm holder
- BOSCH / HOERBIGER hydr. Components
- SIEMENS electrical system
- LEUZE light barrier behind the machine
- FIESSLER AKAS laser with FPSC protective device v.d. machine
- Swiveling control panel, mounted on the left
- 2x front support arms "sliding system", with T-slot and tilting cam
- 1x double foot control
- CE mark / declaration of conformity
- User manual: machine and control in German
- Safety manual: press brakes

## VIDEO-LINKS

## WEB-LINK

[https://lagermaschinen.de/maschinen-datenblatt/Hydr.\\_pressbrake/ERMAK/POWER\\_BEND\\_PRO\\_26.100/1008-8303218](https://lagermaschinen.de/maschinen-datenblatt/Hydr._pressbrake/ERMAK/POWER_BEND_PRO_26.100/1008-8303218)

## MACHINE PICTURES

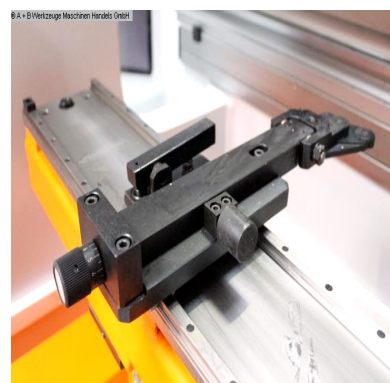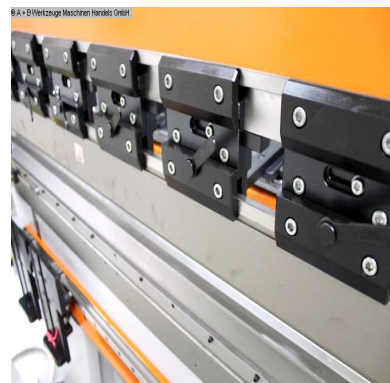

Hydr. pressbrake  
ERMAK  
POWER BEND PRO 26.100  
Stock no. :1008-8303218



+ LAGERMASCHINEN.DE +

+ LAGERMASCHINEN.DE +



Technical specifications according to manufacturer's information / documentation